
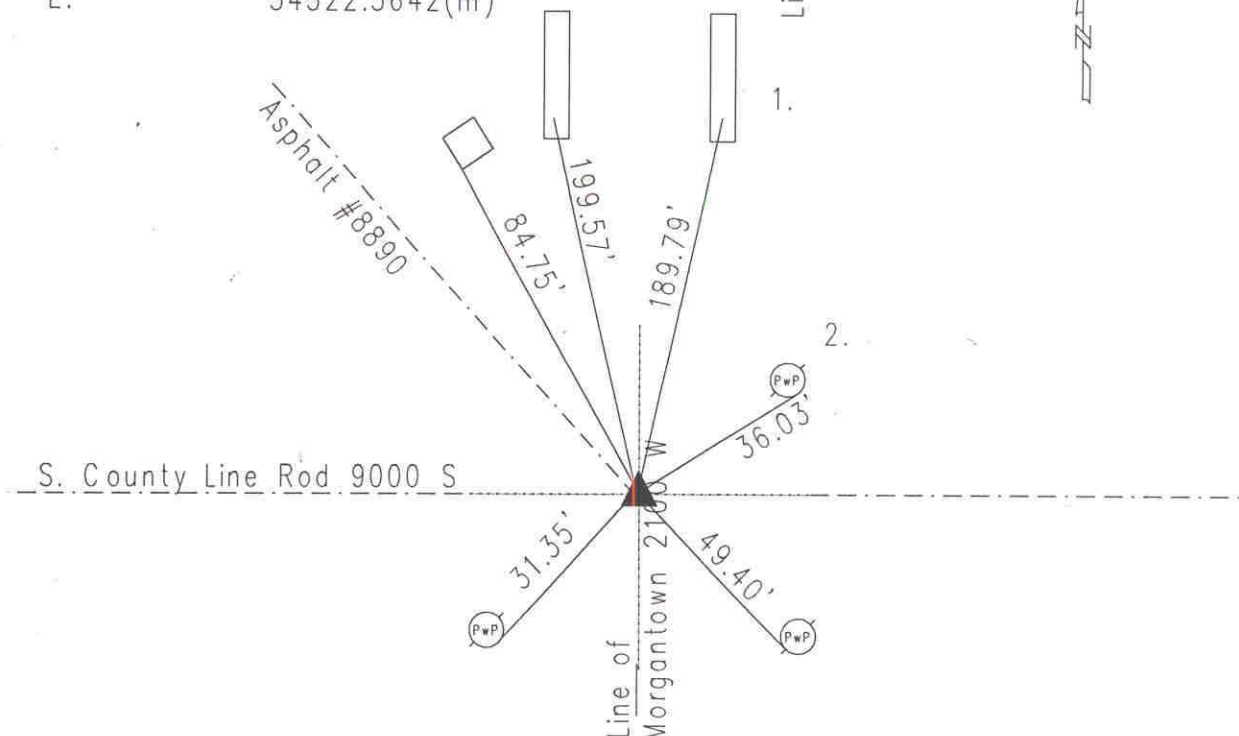


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 22 TOWNSHIP 14 RANGE 3
DATE: 12-20-01
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 8-14-97

IN. S.P.C. E ZONE NAD '83
NAME: 14032207
N: 487060.1120(m)
E: 54522.5642(m)

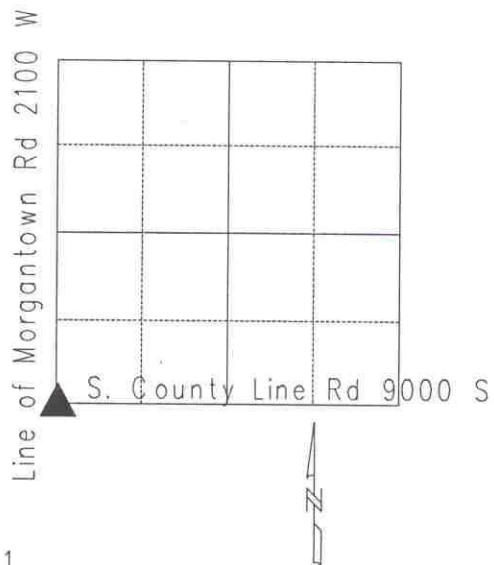

Original post set 1820 by Laughlin with witnesses: 12" beech N 33 E 18 links; 8' buckeye S 20 W 20 links per Marion County Atlas pg. 5. Fatout 9-28-1880 called a rock with no witnesses per Perry Township Legal Survey Book pg. 44. Yawter 9-20-45 called iron pin. Monroe 9-23-53 called iron pin over stone. Monroe 10-4-60 called stone. Miller 7-9-75 called 3/4" steel pin. Wilcoxon 1-3-86 called the same. Kiste 5-14-96 called the same. Excavated by Wilcoxon 8-14-97 and 3/4" steel pin found 8" down. Stone found 15" down. Harrison set. Re-tied 12-20-01 by Wilcoxon.
14032207

REF.	DISTANCE	DESCRIPTION
1.	189.79'	Cut 'x' S-end of walk of bridge
2.	36.03'	Road nail SE PwP#34-812 A 18"up
3.	49.40'	Road nail SW PwP#50-812 B 12"up
4.	31.35'	PK nail in bottle cap SE PwP#243-8111 18"up
5.	84.75'	Most southerly corner : top concrete slab of stone column
6.	199.57'	Cut 'x' S-end of walk of bridge